



QINGDAO WANGYU RUBBER CO.,LTD

青岛旺裕橡胶制品有限公司

青岛旺裕橡胶制品有限公司

QINGDAO WANGYU RUBBER CO.,LTD

工厂地址:山东省青岛市平度明村工业园

Factory: Mingcun Rubber Zone, Pingdu City, Qingdao, China.

电话(phone):0086-532-86316818 86312068

传真(fax):0086-532-86316688

国际贸易地址: 青岛市西海岸新区庐山路6号瑞源名嘉国际12楼

Export Dept: 12th Floor, Ruiyuan Mingjia International Building, No 6 Lushan Road, West Coast New Area, Qingdao, China.

电话(phone):0532-87814911

传真(fax):0532-80986933

E-mail: sales27@wangyutyre.com

Web: www.tiretoptrust.com



COMPANY PROFILE

企业简介

青岛旺裕橡胶制品有限公司

青岛旺裕橡胶制品有限公司成立于1996年，坐落于2018年“上合峰会”的举办地中国山东省青岛市，是一家集橡胶轮胎研发、制造及贸易进出口为一体的综合型生产企业。

公司占地80000平方米，总投资1.5亿元，聚焦于橡胶轮胎制造核心产业，在林业胎、房车胎、工程机械轮胎、工业车辆轮胎、农业轮胎、子午农业轮胎、载重汽车轮胎、轻型载重汽车轮胎、实心轮胎、沙漠轮胎系列产品领域不断创新精进，形成了上千个规格的规模化生产格局。公司灌注高标准、高质量、高性能、高产出之道，高擎雄厚资本技术力量、优良制造加工工艺、精密质量管控体系及灵活运营管理旗帜，创建先进胶料密炼中心，配备自动化、智能化的轮胎成型及硫化生产设备设施，持续运作，满足客户全方位需求，目前橡胶轮胎产能已实现120万条/年。

公司拥有数十项专利证书，先后获得了“青岛市高新技术企业”、“青岛市进出口诚信企业”、“纳税贡献企业”、“青岛市专精特新企业”、“外贸转型升级优秀企业”“精准扶贫先进单位”等多项荣誉。

通过了ISO9001、ISO14001、ISO45001、DOT、SGS、SASO等专业认证，充分见证着公司的研发智慧与产业实力。目前，公司月出口200余个超高柜，业务已遍及欧洲、美洲、中东、东南亚、非洲等全球多个国家和地区国内多个省市自治区，并以高品质、诚服务、优价格、良信誉赢得了国内外客户的广泛信任与认可。

公司一直秉承“质量第一、客户至上”的理念，以诚信经营企业，以精益求精的作风为客户做好每一条轮胎。旺裕轮胎，与您共建美好生活，开创美好未来！

1996年

公司成立

80000 m²

公司占地面积

1.5亿

公司总投资

QINGDAO WANGYU RUBBER CO., LTD., established in 1996, is located in Qingdao, Shandong Province, China, where the 2018 "Shanghai Cooperation Summit" was held, is a comprehensive production enterprise integrating rubber tire research and development, manufacturing and trade import and export.

Our manufactory covers an area of 80,000 square meters, with a total investment of 150 million yuan, focusing on the core industry of rubber tire manufacturing, in the forestry tires, Mobile home tires, OTR tires, Industrial tires, Agricultural tires, Radial agricultural tires, Truck tires, Light truck tires, Solid tires, Desert tires, tires series products, forming a series of thousands of specifications of innovation and refinement.

We have formed a large-scale production pattern with thousands of specifications. The company has been focusing on high standard, high quality, high performance and high output, holding the flag of strong capital and technology, excellent manufacturing and processing technology, precise quality control system and flexible operation management, creating advanced rubber mixing center, equipped with automatic and intelligent tire forming and vulcanization production equipment and facilities, operating continuously to meet the full range of customer needs, and the current rubber tire production capacity has achieved 1.2 million pieces per year.

The company has dozens of patent certificates, and has successively won many honors such as "Qingdao High-tech Enterprise", "Qingdao Import and Export Integrity Enterprise", "Tax Contribution Enterprise", "Qingdao Specialized and Special New Enterprise", "Excellent Enterprise of Foreign Trade Transformation and Upgrading" and "Advanced Unit of Precision Poverty Alleviation". The company has passed ISO9001, ISO14001, ISO45001, DOT, SGS, SASO and other professional certifications, fully witnessing the company's Research and Development Intelligence and industrial strength. At present, the company exports more than 200HC per month, and its business has spread to many countries in the world such as Europe, America, Middle East, Southeast Asia, Africa and many provinces and autonomous regions in China, and has won wide trust and recognition from customers at home and abroad with high quality, sincere service, excellent price and good reputation.

The company has been adhering to the concept of "quality first, customer first", operating the business in good faith, and doing a good job for customers with the style of excellence for each tire. WANGYU Tire, build a better life and create a better future with you!

TOP TRUST
Stronger For Higher
旺裕轮胎

COMPANY CULTURE

企业文化

MISSION 企业使命

为客户创造价值，推动企业持续兴旺。
Create value for customers, and bring enterprise' s
development and prosperity.

为员工谋取利益，助推人类平安富裕。
Seek benefits for staff, and boost mankind' s
peace and prosperity.

CORE VALUES 企业价值观

凭良心做事，靠诚信发展
Doing with conscience, development by integrity.

做精品轮胎，创双合品牌
Produce classic tires, create top trust brand.

ENTERPRISE VISION 企业愿景

百年旺裕，持续发展
Centennial wangyu and sustainable development.

QUALITY CONCEPT

质量理念

质量是一，其他都是零
Quality is the first, all others are zero.

WORKING SLOGAN 工作口号

快乐工作，幸福旺裕；
Happy working, happy wangyu.

旺裕兴旺，我的责任
Wangyu prosperity, my responsibility.



E3/L3

- 多种规格满足不同需求，适用性广，可以用在重型自卸车、铲运机、装载机上在多种条件下作业。
A wide range of sizes to meet different needs, suitable for use on heavy dump trucks, forklifts and loaders in a variety of conditions.
- 主要为横向花纹，胎面与地面接触面积大，具有良好的耐磨性、耐切割性、耐穿刺性。
Mainly transverse tread pattern, the large contact area between tread and ground, good wear resistance, cut resistance, and puncture resistance.

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)	备注 (KM/H)	有无内胎 TYPE
29.5-25	25	32	36	710	1840	12000	335	50/10	TT/TL
29.5-25	25	28	36	710	1840	11500	325	50/10	TT/TL
26.5-25	22	32	35	645	1743	10000	350	50/10	TT/TL
26.5-25	22	28	35	645	1743	9250	300	50/10	TT/TL
26.5-25	22	24	35	645	1743	8250	250	50/10	TT/TL
23.5-25	19.5	28	31	595	1615	8750	400	50/10	TT/TL
23.5-25	19.5	24	31	595	1615	8000	350	50/10	TT/TL
23.5-25	19.5	20	31	595	1615	7300	300	50/10	TT/TL
20.5-25	17	24	29	520	1490	6700	400	50/10	TT/TL
20.5-25	17	20	29	520	1490	6000	325	50/10	TT/TL
18.00-25	13	36	28	495	1615	16000	850	50/10	TT/TL
17.5-25	14	20	25	445	1350	4250	400	50/10	TT/TL
17.5-25	14	16	25	445	1350	4250	300	50/10	TT/TL
16/70-24	13	18	25	410	1175	4000	370	50/10	TT/TL
16/70-20	13	18	25	410	1075	3350	450	50/10	TT/TL
16.00-25	11.25	28	26	430	1490	6700	575	50/10	TT/TL
16.00-24	11.25	28	26	430	1490	6500	570	50/10	TT/TL
16.00-24	11.25	24	26	430	1490	600	475	50/10	TT/TL
16.00-24	11.25	20	26	430	1490	5450	400	50/10	TT/TL
15.5-25	12	12	24	395	1275	3250	250	50/10	TT/TL
14/90-16	8.5H	12	16	215	896	1200	270	50/10	TT/TL
14.00-24	10	28	24	375	1370	5600	650	50/10	TT/TL
14.00-24	10	24	24	375	1370	5150	575	50/10	TT/TL
14.00-24	10	20	24	375	1370	4625	475	50/10	TT/TL
1200-16	8.5	12	20	244	884	1245	390	50/10	TT/TL
750-16	6	10	20	215	810	2100	450	50/10	TT/TL

E3/L3 NEW



- 花纹的地面接触面积大，块状花纹有较好的抓地性能。
The pattern has a large ground contact area and the block pattern has good grip properties.
- 它适用于各种工程机械，如铲运机、重型自卸车、装载机 and 推土机。
It is suitable for a wide range of construction machinery such as scrapers, heavy tippers, loaders, and bulldozers.
- 牵引性能和浮动性能均达到50%。改良的材料配方，使轮胎具有更强的耐磨、耐切割、耐刺扎能力。
Traction performance and floating performance are both 50%. The improved material formulation gives the tire greater resistance to wear, cuts, and punctures.

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)	备注 (KM/H)	有无内胎 TYPE
26.5-25	22	28	35	675	1750	10000	350	50/10	TT/TL
26.5-25	22	32	35	675	1750	11200	425	50/10	TT/TL
23.5-25	19.5	24	32	595	1615	8000	350	50/10	TT/TL
23.5-25	19.5	20	32	595	1615	7300	300	50/10	TT/TL
20.5-25	17	24	29	520	1490	6700	400	50/10	TT/TL
20.5-25	17	20	29	520	1490	6000	325	50/10	TT/TL
20.5/70-16	10	14	16	353	915	1600	390	50/10	TT
17.5-25	14	20	27	445	1350	4250	400	50/10	TT/TL
17.5-25	14	16	27	445	1350	4250	300	50/10	TT/TL
16/70-20	13	18	25	410	1075	3350	450	50/10	TT

G2/L2

- 适用于各种条件下的重型自卸车、铲运车和装载机，特殊的胎面和橡胶配方以及强韧的胎体设计。
Suitable for heavy dump trucks, scrapers and loaders under various conditions, with special tread and rubber formula and strong carcass design.
- 具有优良的耐热性和耐磨性，牵引力强，适用于矿山等建筑工地的工程机械。
Excellent heat resistance and wear resistance, strong traction, suitable for construction machinery in mines and other construction sites.



规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)	备注 (KM/H)	有无内胎 TYPE
15.5-25	12	12	25	360	1254	225	225	50/10	TT/TL
17.5-25	14	16	24	440	1330	3350	275	50/10	TL
14.00-24	8.00TG	14	23.5	360	1350	3450	325	50/10	TT/TL
13.00-24	8.00TG	14	23.5	330	1280	3000	350	50/10	TT/TL

L5



- 原材料为天然橡胶，帘线材料为尼龙。
The raw material is natural rubber and the cord material is nylon.
- 具有较深的装载和推土块，最大单程距离为75米，最大速度为10公里/小时，轮胎胎圈和轮辋是密封的。
Has a deep loading and bulldozing block with a maximum distance of 75 meters one way and a maximum speed of 10 km/h. The tire bead and rim are sealed.
- 具有很大的牵引力，适用于铲运机、重型自卸车、拖拉机和推土机等装载工程机械。
Has great traction and is suitable for loading construction machinery such as scrapers, heavy dump trucks, tractors, and bulldozers.

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)	备注 (KM/H)	有无内胎 TYPE
26.5-25	22.00/3.5	32	82	675	1800	17000	550	50/10	TL
26.5-25	22.00/3.5	28	82	675	1800	15500	475	50/10	TL
23.5-25	19.50/2.5	28	72	595	1675	13600	550	50/10	TL
23.5-25	19.50/2.5	24	72	595	1675	12500	475	50/10	TL
20.5-25	17.00/2.0	28	66	520	1550	11500	625	50/10	TL
20.5-25	17.00/2.0	24	66	520	1550	10300	535	50/10	TL
17.5-25	14.00/1.5	24	60	445	1400	9000	625	50/10	TL
17.5-25	14.00/1.5	20	60	445	1400	8250	575	50/10	TL
20.5/70-16	10.00G	16	46	356	955	1785	320	50/10	TT
16/70-20	13	16	50	410	1090	3150	400	50/10	TT

L5S

- OTR轮胎具有广泛的适用性，适用于各种条件下的重型自卸车、铲运机和装载机。
OTR tire has wide applicability for heavy dump trucks, scrapers and loaders in various conditions.
- 由于采用了特殊的胎面和橡胶配方以及强有力的胎体设计，具有优异的耐热性和耐磨性，牵引力强。
Thanks to the special tread and rubber formulation and strong casing design, it has excellent heat and wear resistance and high traction power.



规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)	备注 (KM/H)	有无内胎 TYPE
12.00-24	8.5	24	55	315	1275	7500	975	50/10	TT
17.5-25	14.00/1.5	20	60	445	1365	8250	575	50/10	TL
10.00-20	7.5	16	/	255	1015	6085	790	50/10	TT



SH617

- 材质为天然橡胶，帘线材质为尼龙，胎体为黑色。
The material is natural rubber; the cord material is nylon; and the tire body is black.
- 该产品具有较大的沟槽面积，占接地面积的50%以上，因而对松软路面有良好的附着力。
The product has a large groove area, accounting for more than 50% of the grounding area, and thus has good adhesion to loose road surfaces.
- 具有良好的自洁性能，牵引力大。
It has good self-cleaning performance and high traction force.

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)	有无内胎 TYPE
13.00-25	8.5	28	26	307	1297	4600	700	TT
12.00-20	8	20	29	310	1130	4670	790	TT



C1

- C-1是一种光面轮胎，主要用于压路机。
C-1 is a smooth tire, mainly used for road rollers.
- 在软地和硬地的牵引性能是一样的，抗割性和耐磨性可以达到75%。最高速度可达10公里/小时。
Traction performance is the same on soft and hard ground, and cut and abrasion resistance can be up to 75%. The maximum speed is up to 10 km/h.
- 由于特殊的胎面和橡胶配方以及强大的胎体设计，具有良好的耐热性和耐磨性，以及强大的牵引力。
Due to the special tread and rubber formulation and strong carcass design, it has good heat and wear resistance, as well as strong traction.

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)	备注 (KM/H)	有无内胎 TYPE
9.00-20	7	14	/	255	1015	4375	725	10	TT
9.00-20	7	16	/	255	1015	4750	825	10	TT



SH307

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
1000-20	7.5	16	19	278	1060	3230	690
900-20	7	14	19	259	1025	2770	720

SH298

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
28*9-15	7	14	17	230	700	3250	730
7.00-12	5.00S	12	15	190	676	2720	860
6.50-10	5.00F	10	13.5	175	510	2170	1000



SH288

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
12.00-20	8.5	20	32	315	1125	10640	900
10.00-20	7.5	16	30	278	1055	8320	830



TOP TRUST
stronger for higher



SH278

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
8.25-15	6.5	14	17	235	840	3700	800
8.25-12	7	12	15	235	696	2850	790
28*9-15	7	14	17	230	700	3250	730
750-15	6	12	15	215	808	2650	790
7.00-15	5.5	12	15	178	735	2665	860
7.00-12	5.00S	12	15	190	676	2720	860
7.00-9	5.00S	10	13	190	590	2145	850
6.50-10	5.00F	10	13.5	175	510	2170	1000
6.00-9	4.00E	10	11.5	160	540	1680	860
5.00-8	3.50D	10	10	137	470	1290	510



SH618

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	双胎最大负荷 LOAD DUAL (kg)	单胎最大负荷 LOAD SINGLE (kg)	双胎气压 DUAL PRESSURE(Kpa)	单胎气压 SINGLE PRESSURE(Kpa)
825-16	6.5H	16	22	238	871	1600	1750	600	630
750-16	6.00G	14	20	219	820	1320	1500	700	730
700-16	5.50F	14	18	205	790	1060	1215	600	630



R3

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)	有无内胎 TYPE
23.1-26	DW20	12	16	595	1426	3610	170	TT/TL



G2/L2

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)	有无内胎 TYPE
15-19.5	11.75	14	22	390	1020	4565	480	TL
14-17.5	10.5	14	22	350	920	3875	550	TL
12-16.5	9.75	10	21	307	840	2540	450	TL
10-16.5	8.25	8	21	264	770	1880	410	TL

R4

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)	有无内胎 TYPE
18.4-26	DW16A	12	27	448	1405	2985	230	TL
18.4-24	DW16	12	26	444	1365	3750	250	TL
21L-24	DW18	12	26	553	1400	2410	190	TL
19.5L-24	DW16	12	25	495	1340	2145	210	TL
17.5L-24	W15L	10	25	445	1265	1725	150	TL
16.9-28	W15L	10	25	430	1435	2380	200	TL
16.9-24	W15L	10	25	430	1335	2230	200	TL



SKS4

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)	有无内胎 TYPE
12-16.5	9.75	12	27	307	831	2865	550	TL
10-16.5	8.25	10	26	264	773	2135	520	TL



R4

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)	有无内胎 TYPE
12.5/80-18	9	12	22.5	317	940	2625	370	TL
10.5/80-18	9	10	22	279	875	2000	400	TL



L5

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)	有无内胎 TYPE
12-16.5	9.75	12	34	307	831	2865	550	TL
10-16.5	8.25	10	33	264	773	2135	520	TL
20.5/70-16	10	14	45	353	915	1600	390	TL
16/70-20	13	18	46	410	1074	3350	450	TL



R2

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
600-12	4.50E	8	28	165	640	405	250
600-14	4.50E	8	29	165	690	450	250
650-16	5.00F	8	30	180	765	565	250
750-16	5.50F	8	30	205	815	650	280
750-20	5.00F	10	30	205	910	695	240
8.3-20	W7	10	32	210	900	695	240
8.3-24	W7	10	35	210	995	810	250
9.5-20	W8	10	33	240	965	810	250
9.5-24	W8	10	36	240	1050	940	280
11.2-20	W10	10	50	285	1005	1085	240
11.2-24	W10	10	50	285	1105	1045	240
11.2-28	W10	10	54	284	1205	1300	240
12.4-24	W11	10	50	315	1175	1640	290
9.5-28	W8	10	52	240	1165	1280	320
11.2-20	W10	10	53	285	1034	1270	300
11.2-24	W10	10	50	285	1134	1380	300
11.2-28	W10	10	63	285	1234	1485	300
12.4-28	W11	10	50	315	1293	1660	270

R2



PR1



规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
12.4-28	W11	10	52	315	1270	1510	230
12.4-48	W11	12	66	305	1800	3560	280
13.6-24	W12	10	56	345	1210	2200	360
14.9-24	W13	10	56	378	1295	1910	230
14.9-26	W13	10	56	378	1335	1960	230
15L-24	DW14	10	65	410	1352	2800	250
16.9-28	W15L	12	62	430	1458	2560	250
16.9-34	W15L	12	65	430	1600	2600	210
18.4-30	W16L	12	68	467	1565	2800	190
18.4-38	W16L	12	68	467	1800	3475	230
18.4-42	W16	12	75	467	1400	3700	210
19.5L-24	CW16	12	65	495	1350	2140	210
20.8-38	W18L	12	75	528	1870	3900	200
23.1-26	DW20	12	75	587	1660	3246	170
28L-26	DW25	12	75	715	1648	3610	170
420/85D26	W15L	12	60	378	1354	2000	230
420/85D28	W15L	12	60	378	1404	2120	230
420/85D30	W15L	12	60	378	1419	2400	280
460/85D38	W16L	16	75	467	1702	2990	180
520/85D42	W18L	16	70	530	1950	4200	160

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
11-32	W10	10	72	305	1465	1080	160
12.4-24	W11	10	72	315	1245	1080	230
12.4-28	W11	10	72	315	1315	1785	220
14.9-24	W12	10	72	378	1410	1760	180
14.9-26	W13	10	72	378	1419	2040	230
14.9-28	W13	10	72	378	1510	1880	230
16.9-28	W15L	12	80	430	1530	2200	200
16.9-30	W15L	12	80	430	1585	2455	200
16.9-34	W15L	12	80	430	1680	3385	220
18.4-38	W16L	12	88	467	1855	3575	230
18.4-42	W16	12	88	467	1430	3700	210
20.8-38	W18L	12	90	528	1887	4000	200
13.6-24	W12	10	85	345	1270	2165	240
13.6-38	W12	10	80	345	1710	2780	250




PR1

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
600-12	4.5E	8	45	165	690	425	270
650-16	5.00F	8	60	173	805	565	250
750-16	5.50F	8	68	205	910	750	300
8.3-20	W7	10	68	210	950	970	270
8.3-24	W7	10	68	210	1050	1200	320
9.5-20	W8	10	70	240	1050	1140	240
9.5-24	W8	10	70	240	1150	1420	310
11.2-24	W10	10	72	285	1205	1465	210
6.00-14	4.50E	8	50	160	740	520	320
11.2-28	W10	8	80	285	1300	1825	270



I3C

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
10.0/75-15.3	9	10	20	270	790	1550	300
400/60-15.5	13	14	20	404	874	2240	400
400/55-22.5	13	16	25	404	1012	2180	320
500/45-22.5	16	16	25	503	1022	2360	280
500/60-22.5	16	16	26	503	1173	4250	500
600/55-22.5	20	16	26	611	1132	4000	280
700/50-22.5	24	16	27	700	1270	4000	220
700/50-26.5	24	16	27	700	1333	4100	240
320/60-15.3	11	12	15	340	760	1950	390
15.0/55-17	13	14	13	391	850	2575	490
19.0/45-17	16	14	16	491	866	2800	390
500/50-17	16	14	16	500	945	3550	380

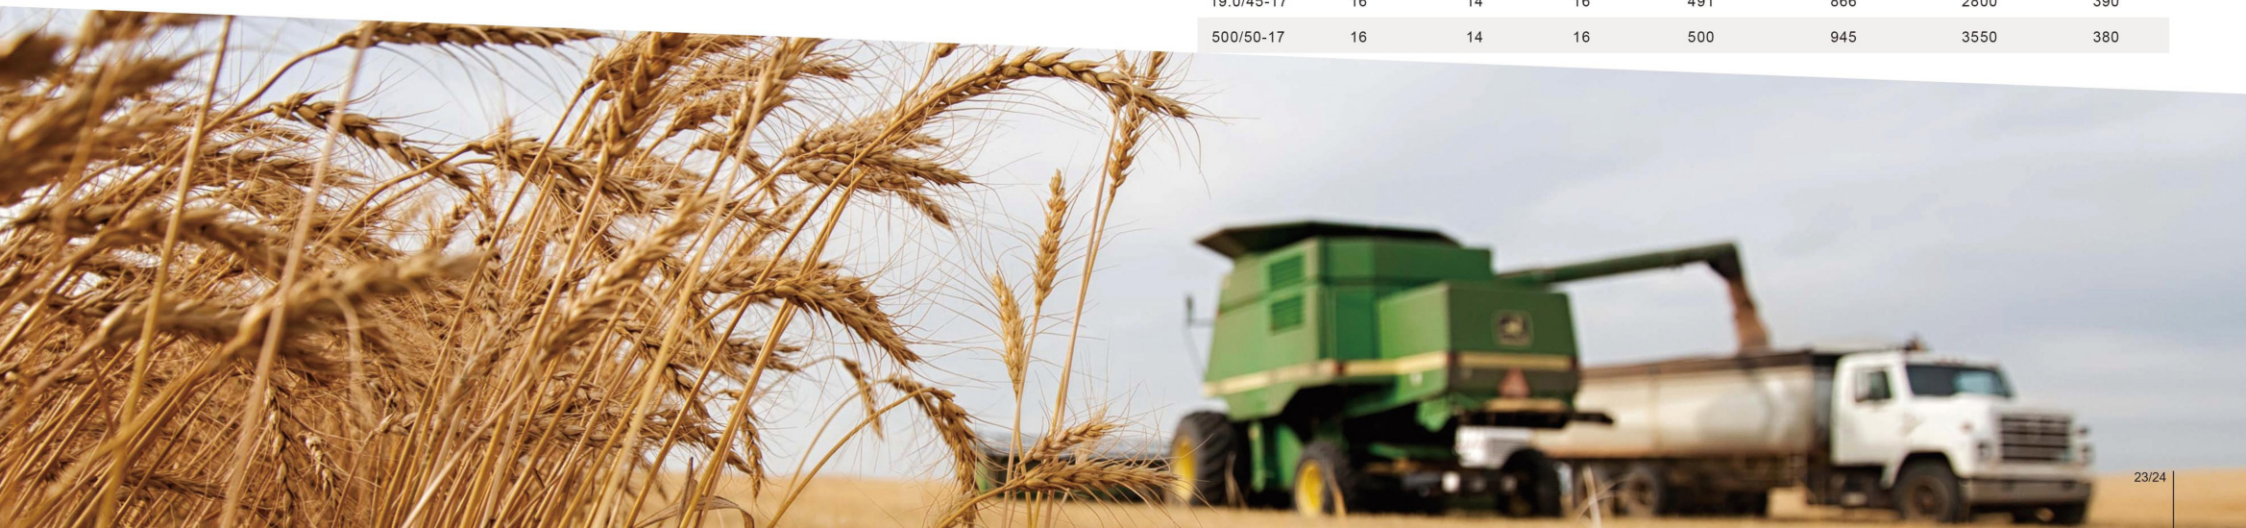



I3i

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
20.5/70-16	10	14	45	353	915	1600	390
16/70-20	13	18	46	410	1074	3350	450
16/70-24	13	18	48	410	1175	4000	370



R1

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
16/70-20	13	18	46	410	1074	3350	450
20.5/70-16	10	14	45	353	915	1600	390

CR1

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
12.4-48	W11	12	38	315	1740	2900	320
12.4-54	W11	12	38	315	1900	3200	310



F2B

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
6.5-20	5.00F	8	11	180	860	865	420
6.5-16	4.50E	8	10	175	760	735	420
6.00-16	4.00E	6	10	160	740	560	340
5.00-15	4.00	6	8.5	120	658	465	420
4.00-16	3.00D	6	8	122	655	350	340
4.00-14	3.00D	6	7	110	590	405	255
4.00-12	3.00D	6	7	110	535	300	330



CR2

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
9.5-32	W8	10	58	240	1260	1260	280
9.5-38	W8	10	58	240	1460	1180	210
11-32	W10	10	60	305	1375	1530	290
12-38	DW11	12	60	330	1575	1570	140
12.4-48	W11	12	66	305	1800	3560	280
9.5-48	W8	12	60	240	1696	1750	340



F2C

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
11.00-16	W10L	8	24	315	970	1180	310
10.00-16	W8L	8	21	275	910	1060	310
7.50-18	5.50F	8	12	205	860	945	370
7.50-16	5.50F	8	11	205	810	870	370

R1W



规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
600-16	4.50E	8	26	165	745	405	250
6.5-16	5.00F	8	30	180	765	565	250
750-16	5.50E	8	30	205	810	720	280
8.3-24	W7	8	36	210	996	830	250
9.5-24	W8	10	40	240	1050	1110	280
11.2-24	W11	10	40	285	1105	1225	240
16.9-26	W15L	12	45	429	1380	2560	240
6-12	4.50E	8	27	165	640	520	330
6-14	4.50E	8	30	165	690	530	330
7-12	5.00F	6	30	190	680	450	250
8.3-20	W7	8	38	210	895	850	310
9.5-16	W8	8	30	240	850	900	260
9.5-20	W8	8	39	240	950	955	280
9.5-32	W8	8	50	240	1250	1260	280
9.5-38	W8	8	50	240	1460	1400	280
11-32	W10	10	42	285	1392	1500	300
11.2-28	W10	8	45	285	1205	1305	240
12.4-28	W11	10	45	315	1260	1700	280
13.6-16	W12	8	38	345	1000	1060	150

R1



规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
8.3-22	W6.5	6	42	190	940	750	240

F3B

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
11L-16	8	8	13.5	279	838	1175	220
11L-15	8	8	13	279	813	1130	220



F3C



规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
10.0/75-15.3	9.00	14	9	264	740	1915	490
10.0/75-15.3	9.00	12	9	264	740	1720	430
10.0/75-15.3	9.00	10	9	264	740	1525	390
11.5/80-15.3	9.00	10	10	290	845	1930	340



规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	花纹对数 PAIRS OF PATTERN	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
18.4-34	W16L	10	36	20	467	1655	2990	180
18.4-30	W16L	10	36	19	467	1550	2815	180
18.4-26	DW16	10	35	19	467	1450	2645	180
16.9-38	W15L	10	36	20	464	1685	2760	200
16.9-34	W15L	10	36	20	429	1585	2605	200
16.9-30	W15L	10	36	19	447	1499	2455	200
16.9-28	W15L	10	35	18	430	1435	2380	200
16.9-24	W15L	10	33	18	430	1335	2230	200
15.5-38	W14L	10	34	22	391	1549	1760	207
15.5/80-24	W13	14	35	18	375	1240	3150	350
15-24	W14	10	32	16	400	1310	2800	280
14.9-30	W13	10	32	21	378	1415	2190	230
14.9-28	W13	10	34	19	378	1365	2120	230
14.9-26	W13	10	32	20	378	1315	2055	230
14.9-24	W15L	10	22	17	378	1265	1990	230
13.6-38	W12	10	34	22	328	1548	2215	250
13.6-28	W12	10	31	19	345	1310	1910	250
13.6-24	W12	10	30	18	345	1210	1790	250
12.4-28	W11	10	29	20	315	1260	1600	240
12.4-24	W11	10	29	18	315	1160	1450	240
12-38	11	10	35	23	298	1563	1600	210
11.2-38	10.00	10	32	22	284	1448	1180	221
11.2-28	W10	10	28	18	285	1205	1490	310
11.2-24	W10	8	26	18	285	1105	1225	240
10.0/75-15.3	9.00	10	28.5	20	260	892	1625	390
9.50-24	W8	8	25	21	240	1050	1110	280
9.50-20	W8	8	25	19	240	1050	955	280
8.5-20	W7	8	24	20	210	895	715	260
8.3-24	W7	6	24	23	210	995	810	240
8.3-20	W7	8	24	20	210	895	715	260
7.50-20	5.50F	8	21	24	205	910	800	230
7.50-16	5.50F	8	21	19/22	205	810	700	230
6.00-16	4.50E	8	19	19	165	745	520	270
6.00-12	4.50E	8	20	16	165	640	450	270
5.50-17	4.00E	6	18	/	140	750	780	520
5.00-12	4.00E	6	15	13	145	590	320	210



F2M

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
11.00-16	W10L	8	23	315	970	1180	310
10.00-16	W8L	8	21	275	910	1060	310



R1

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	花纹对数 PAIRS OF PATTERN	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
23.1-26	DW20	10	36	19	554	1542	3245	140
20.8-38	W18L	12	38	21	528	1835	4000	200
18.4-42	W16	10	35	22	467	1857	3330	180
18.4-38	W16L	10	37	21	467	1755	3165	180



SH521

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
4.00-8	3.00D	4	6.5	112	415	225	275

SH511

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
4.00-8	3.00D	4	6.5	112	415	225	275



SH516



规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
5.00-16	3.00D	10	8	130	665	850	400
5.00-14	3.00D	8	8	130	615	895	530
4.50-16	3.00D	8	8	122	655	615	360
4.50-14	3.00D	8	7	122	605	680	426
4.00-14	3.00D	8	7	112	590	405	255
4.00-12	3.00D	6	7	112	520	300	330



I1

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
12.5L-15	10.00	8	9.5	318	823	1400	360
11L-16	W8L	8	9	280	800	1115	280
11L-15	W8L	8	9	280	775	1070	280
11L-14	8KB	8	9	280	750	1245	220
10-15	9	10	9	270	753	1520	390
9.5L-15	8LB	8	8.5	240	765	1100	280
9.5L-14	7.00	8	8.5	241	741	1150	300



RADIAL AGRICULTURAL TIRES

农子午胎



85R1W

规格 TIRE SIZE	TT/TL	花纹代码 TIRE SIZE	负荷指数 LOAD INDEX	速度级别 SPEED LEVEL	标准轮辋 STANDARD RIM	外直径 OVERALL DIAMETER (mm)	断面宽 SECTION WIDTH (mm)	标准气压 PRESSURE (Kpa)	单胎负荷 SINGLE FETAL LOAD	花纹深度 DEEP(mm)
420/85R38 16.9R38	TL	R-1W	144/141	A8/B	W13	1679	418	160	2650	51



65/70R1W



规格 TIRE SIZE	TT/TL	花纹代码 TIRE SIZE	负荷指数 LOAD INDEX	速度级别 SPEED LEVEL	标准轮辋 STANDARD RIM	外直径 OVERALL DIAMETER (mm)	断面宽 SECTION WIDTH (mm)	标准气压 PRESSURE (Kpa)	单胎负荷 SINGLE FETAL LOAD	花纹深度 DEEP(mm)
540/65R28	/	TL R-1W	142/145	D/A8	W18L	1413	550	160	2650	48
540/65R30	/	TL R-1W	143/146	D/A8	W18L	1464	550	160	2725	48
600/65R28	/	TL R-1W	147/150	D/A8	W18L	1491	591	160	3075	50
650/65R38	/	TL R-1W	157/160	D/A8	DW20A	1811	645	160	4125	51
650/65R42	/	TL R-1W	158/161	D/A8	DW20A	1913	645	160	4250	51
600/70R30	/	TL R-1W	152/155	D/A8	W18L	1602	591	160	3550	51
710/70R38	/	TL R-1W	166/169	D/A8	DW23A	1959	716	160	5300	58
710/70R42	/	TL R-1W	168/171	D/A8	DW23A	2061	716	160	5600	58
420/85R30	16.9R30	TL R-1W	140/140	A8/B	W13	1476	418	160	2500	48
460/85R30	18.4R30	TL R-1W	145/145	A8/B	W14L	1544	455	160	2900	50
520/85R42	20.8R42	TL R-1W	157/157 162/162	A8/B A8/B	DW16L	1951	516	160 240	4152 5150	51
520/85R46	20.8R46	TL R-1W	158/158	A8/B	DW16L	2062	516	160	4250	51
800/65R32	30.5LR32	TL R-1W	172/172 178/178	A8/B A8/B	DW25A	1853	798	240 320	6300 7500	56

85R1W



规格 TIRE SIZE	TT/TL	花纹代码 TIRE SIZE	负荷指数 LOAD INDEX	速度级别 SPEED LEVEL	标准轮辋 STANDARD RIM	外直径 OVERALL DIAMETER (mm)	断面宽 SECTION WIDTH (mm)	标准气压 PRESSURE (Kpa)	单胎负荷 SINGLE FETAL LOAD	花纹深度 DEEP(mm)
280/85R24	11.2R24	TL R-1W	115/112	A8/B	W9	1086	282	160	1215	41
320/85R24	12.4R24	TL R-1W	122/119	A8/B	W10	1154	319	160	1500	42
380/85R24	14.9R24	TL R-1W	131/128	A8/B	W12	1256	380	160	1950	46
460/85R34	18.4R34	TL R-1W	147/144	A8/B	W14L	1646	455	160	3075	49
320/85R28	12.4R28	TL R-1W	124/121	A8/B	W10	1255	319	160	1600	42
380/85R28	14.9R28	TL R-1W	133/130	A8/B	W12	1357	380	160	2060	46
420/85R28	16.9R28	TL R-1W	139/136	A8/B	W13	1425	418	160	2430	48
460/85R38	18.4R38	TL R-1W	149/146	A8/B	W14L	1747	455	160	3250	50
520/85R38	20.8R38	TL R-1W	155/152	A8/B	DW16L	1849	516	160	3875	51





SH701

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
12.00-20	8.5	12	15	290	1150	4750	580

SH702

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
16.00-20	11.25	18	10	430	1390	4800	400
14.00-20	10	18	9	330	1215	3270	425



SH703

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
14.00-20	10	18	9	330	1215	3270	425

SH705

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
9.00-17	17 INCH	8	8.5	225	856	1360	310
9.00-16	16 INCH	8	8	225	834	1320	310



SH705

SH706

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
14.00-20	10	18	9	330	1215	3270	425



SH706

LIGHT TRUCK BIAS TIRES

轻型载重汽车轮胎



SH623

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	最大负荷 LOAD SINGLE (kg)	标准气压 PRESSURE (Kpa)
8.25-16	6.50H	16	12	235	855	1500	1705	630
7.50-16	6.00G	16	11	215	805	1320	1500	730
7.00-16	5.50F	14	10	200	775	1075	1220	630
6.50-16	5.50F	10	10	185	750	860	975	530

SH613

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	最大负荷 LOAD SINGLE (kg)	标准气压 PRESSURE (Kpa)
9.00-16	6.50H	14	12	255	890	1720	1955	630
8.25-16	6.50H	16	12	235	855	1500	1705	630
7.50-20	6	14	12	215	935	1655	1885	810
7.50-16	6.00G	16	11	215	805	1320	1500	730
7.00-20	5.5	12	12	200	904	1385	1580	640
7.00-16	5.50F	14	10	200	775	1075	1220	630



SH624

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	最大负荷 LOAD SINGLE (kg)	标准气压 PRESSURE (Kpa)
7.50-15	6	12	10	215	808	1210	1307	630
7.00-15	5.50F	10	10	200	750	915	1040	530



SH524

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	最大负荷 LOAD SINGLE (kg)	标准气压 PRESSURE (Kpa)
6.50-15	4.50E	8	10	180	730	720	820	420
6.50-14	4 1/2J	8	10	180	705	690	785	420
6.00-15	4.5E	8	10	170	705	630	720	420
6.00-14	4 1/2J	8	10	170	680	600	685	420
6.00-13	4 1/2J	8	8	170	655	570	655	420
5.50-13	4J	8	8	160	620	500	565	420
5.00-12	3.50B	8	6	154	582	462	487	400



SH625

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	最大负荷 LOAD SINGLE (kg)	双胎气压 DUAL PRESSURE (Kpa)	单胎气压 SINGLE PRESSURE (Kpa)
10.00-20	7.5	16	14.5	278	1055	2630	3000	740	810
9.00-20	7	14	14	259	1018	2255	2575	700	770
8.25-20	6.50H	14	12.5	235	974	1940	2205	740	810

SH614



规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	最大负荷 LOAD SINGLE (kg)	双胎气压 DUAL PRESSURE (Kpa)	单胎气压 SINGLE PRESSURE (Kpa)
10.00-20	7.5	16	14.5	278	1055	2630	3000	740	810
9.00-20	7	14	14	259	1018	2255	2575	700	770
8.25-20	6.50H	14	12.5	235	974	1940	2205	740	810

SH615



规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	标准气压 PRESSURE (Kpa)
14.00-20	10	18	21	375	1240	4000	600



SH628 (Trailer Tire)

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	单胎负荷 LOAD SINGLE (kg)	双胎负荷 DUAL LOAD (kg)	单胎气压 SINGLE PRESSURE (Kpa)	
ST225/90D16	ST750-16	6J	12	10	220	808	1800	1600	660
ST205/90D15	ST700-15	5 1/2J	10	10	202	752	1320	1150	550



SH627 (Mobile Home Tire)

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD SINGLE (kg)	标准气压 PRESSURE (Kpa)
8-14.5	6.00MH	14	5.5	203	707	1285	690



SH616



规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	最大负荷 LOAD SINGLE (kg)	标准气压 PRESSURE (Kpa)
7.00-15	5.50F	10	10	200	750	915	1040	530
6.50-16	5.50F	10	10	185	750	860	975	530

SH516

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	最大负荷 LOAD SINGLE (kg)	标准气压 PRESSURE (Kpa)
6.50-14	41/2J	8	10	180	705	690	785	420
6.00-16	4.50E	10	8	158	710	755	860	530
6.00-15	4.5E	8	10	170	705	630	720	420
6.00-14	41/2J	8	10	170	680	600	685	420
6.00-13	41/2J	8	8	170	655	570	655	420



SH631

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	最大负荷 LOAD SINGLE (kg)	双胎气压 DUAL PRESSURE (Kpa)	单胎气压 SINGLE PRESSURE (Kpa)
7.50-16	6.00G	14	16	215	815	1320	1500	700	730



SH632

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	最大负荷 LOAD SINGLE (kg)	双胎气压 DUAL PRESSURE (Kpa)	单胎气压 SINGLE PRESSURE (Kpa)
8.25-16	6.50H	14	17	235	867	1500	1700	600	630
7.50-16	6.00G	14	16	215	815	1320	1500	700	730
7.00-16	5.50F	12	16	200	785	1060	1215	600	630



SH626

规格 TIRE SIZE	标准轮辋 STANDARD RIM	层级 PLY RATING	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	最大负荷 LOAD (kg)	最大负荷 LOAD SINGLE (kg)	双胎气压 DUAL PRESSURE (Kpa)	单胎气压 SINGLE PRESSURE (Kpa)
7.50-16	6.00G	16	11	215	805	1320	1500	730	730
7.00-16	5.50F	14	10	200	775	1075	1220	630	630
6.50-16	5.50F	10	10	185	750	860	975	530	530



LS2



规格 TIRE SIZE	层级 PLY RATING	TT/TL	花纹代码 PATTERN CODE	标准轮辋 STANDARD RIM	花纹深度 DEEP (mm)	断面宽 SECTION WIDTH (mm)	外直径 OVERALL DIAMETER (mm)	标准气压 PRESSURE (Kpa)	单胎负荷 SINGLE FETAL LOAD	负荷指数 LOAD INDEX	
320/85-24	12.4-24	14PR	TT/TL	LS-2	W11	41	315	1160	350	1900	130 A8/127 B
380/85-24	14.9-24	14PR	TT/TL	LS-2	W13	43	378	1265	370	2360	138 A8/134 B
380/85-26	14.9-26	14PR	TT/TL	LS-2	W13	43	378	1315	310	2650	142 A8/137 B
460/85-26	18.4-26	16PR	TT/TL	LS-2	DW16	52	467	1450	270	3350	150 A8/147 B
600/80-26	23.1-26	16PR	TT/TL	LS-2	DW20	53	587	1630	240	4450	160 A6
710/65-26	28L-26	20PR	TT/TL	LS-2	DW25	55	715	1645	240	5150	165 A6
—	28.1-26	22PR	TT/TL	LS-2	DW25	55	716	1650	240	5300	166 A8
600/65-28	—	16PR	TT/TL	LS-2	DW20	52	587	1680	270	4375	159 A8
420/85-30	16.9-30	16PR	TT/TL	LS-2	W15L	48	430	1510	320	3250	149 A8/146 B
460/85-30	18.4-30	16PR	TT/TL	LS-2	DW16	52	467	1575	280	3450	151 A8/148 B
600/80-30	23.1-30	18PR	TT/TL	LS-2	DW20	54	587	1730	270	4625	161 A6
650/75-32	24.5-32	24PR	TT/TL	LS-2	DW21	55	622	1830	310	6300	172 A6
800/65-32	30.5L-32	32PR	TT/TL	LS-2	DW27	55	775	1845	340	8000	180 A6
900/65-32	35.5L-32	32PR	TT/TL	LS-2	DW31	58	902	2011	280	9000	184 A6
460/85-34	18.4-34	16PR	TT/TL	LS-2	W16L	52	467	1680	300	4000	156 A8/153 B
520/85-38	20.8-38	18PR	TT/TL	LS-2	DW18L	55	528	1835	310	5000	164 A8/159 B
520/85-42	20.8-42	18PR	TT/TL	LS-2	DW18L	58	528	1935	310	5600	168 A8/165 B